
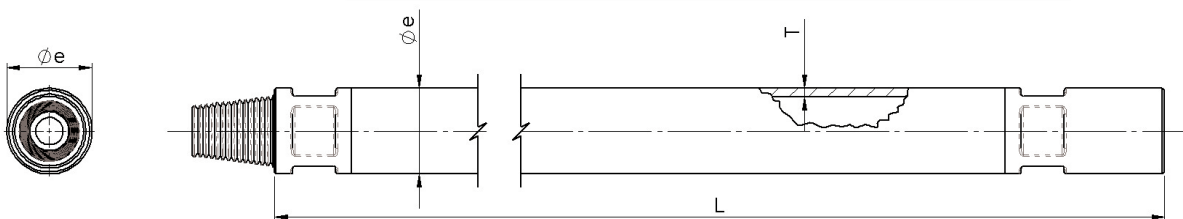


ASTE Frizionate

Friction Welded Rods

CARANDINA

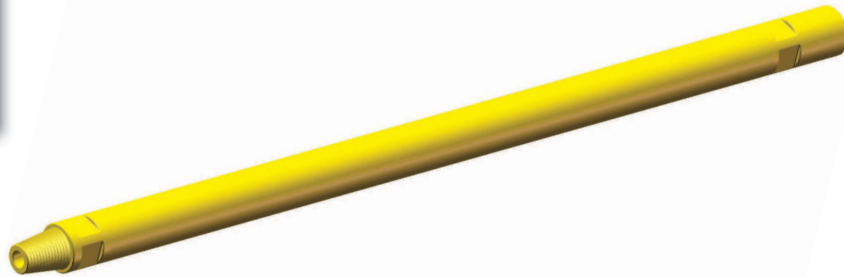

Codice	Diam. di perforaz.	Spessore	Filetto Conico	Peso	Lunghezza
Part nr.	Drilling Diam.	Thickness	Conical Thread	Weight	Length
-	Øe (mm)	T (mm)	F	W (kg)	L (mm)
AF54	54	4 + 6,3 ÷ 8	N.F.	11 ÷ 29	1000 + 3000
AF63	63	4 + 6,3 ÷ 8	N.C.	10 ÷ 50	1000 + 6000
AF70	70	4 + 6,3 ÷ 8	ACT	10 ÷ 52	1000 + 6000
AF76	76	4 + 6,3 ÷ 8	2"3/8 AR	12 ÷ 86	1000 + 6000
AF90	90	4 + 6,3 ÷ 8	2"3/8 + 2"7/8 AR	15 ÷ 67	1000 + 6000
AF101	101	4 + 6,3 ÷ 8	2"3/8 + 2"7/8 AR	20 ÷ 128	1000 + 6000
AF114	114	4 + 6,3 ÷ 8	2"7/8 + 3"1/2 AR	25 ÷ 149	1000 + 6000
AF127	127	4 + 6,3 ÷ 8	2"7/8 + 3"1/2 AR	33 ÷ 168	1000 + 6000
AF140	140	4 + 6,3 ÷ 8	3"1/2 + 4"1/2 AR	40 ÷ 150	1000 + 6000



Carandina S.r.l. continually improve its products reserving the right to modify data without warning.

Carandina S.r.l. migliora costantemente i propri prodotti riservandosi il diritto di modificarli senza preavviso.

Tubos de Fricción



Tiges Soudées par Friction

