




Trivella per Roccia Rock Auger

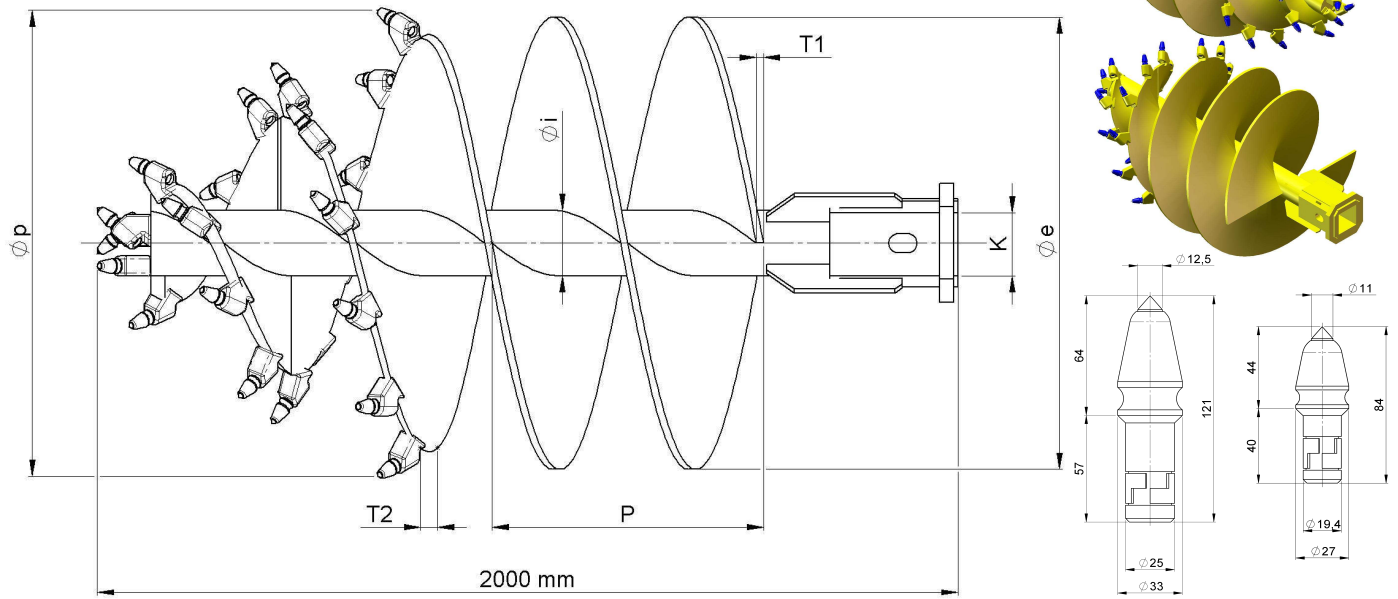

| Diametro di perforazione | Diametro esterno elica | D. interno (D. tubo) | Passo | N° Picchi | | Spessore spira | Spessore spira | Lato interno attacco quadro | Codice |
|--------------------------|-------------------------|-----------------------------|--------|-------------------|------|------------------|------------------|-----------------------------|----------------|
| Drilling Diameter | Auger external diameter | Internal Diam. (Pipe Diam.) | Pitch | Number of Bullets | | Flight Thickness | Flight Thickness | Kelly Box dimension | Part Number |
| Øp (mm) | Øe (mm) | Øi (mm) | P (mm) | Ø 19,4 | Ø 25 | T1 (mm) | T2 (mm) | K (mm) | |
| 400 | 380 | 133 | 400 | 10 | - | 20 | 30 | 130 | TR040-1-200-12 |
| | | | | | | | | 200 | TR040-2-200-12 |
| 500 | 475 | 133 | 400 | 14 | - | 20 | 30 | 130 | TR050-1-200-23 |
| | | | | | | | | 200 | TR050-2-200-23 |
| 600 | 570 | 152 | 500 | - | 16 | 20 | 30 | 130 | TR060-1-200-23 |
| | | | | | | | | 200 | TR060-2-200-23 |
| 700 | 665 | 152 | 500 | - | 18 | 20 | 30 | 130 | TR070-1-200-23 |
| | | | | | | | | 200 | TR070-2-200-23 |
| 800 | 760 | 152 | 600 | - | 20 | 20 | 30 | 130 | TR080-1-200-23 |
| | | | | | | | | 200 | TR080-2-200-23 |
| 900 | 855 | 152 | 600 | - | 22 | 20 | 30 | 130 | TR090-1-200-23 |
| | | | | | | | | 200 | TR090-2-200-23 |
| 1000 | 950 | 168 | 600 | - | 26 | 20 | 30 | 130 | TR100-1-200-23 |
| | | | | | | | | 200 | TR100-2-200-23 |
| 1200 | 1140 | 168 | 600 | - | 30 | 20 | 30 | 130 | TR120-1-200-23 |
| | | | | | | | | 200 | TR120-2-200-23 |
| 1400 | 1330 | 177 | 700 | - | 36 | 20 | 30 | 130 | TR160-1-200-23 |
| | | | | | | | | 200 | TR160-1-200-23 |
| 1600 | 1520 | 177 | 800 | - | 40 | 20 | 30 | 130 | TR160-2-200-23 |
| | | | | | | | | 200 | TR160-2-200-23 |
| 1800 | 1710 | 177 | 800 | - | 44 | 20 | 30 | 130 | TR180-1-200-23 |
| | | | | | | | | 200 | TR180-2-200-23 |
| 2000 | 1900 | 177 | 800 | - | 50 | 30 | 40 | 130 | TR200-1-200-34 |
| | | | | | | | | 200 | TR200-2-200-34 |
| 2200 | 2090 | 203 | 800 | - | 54 | 30 | 40 | 130 | TR220-1-200-34 |
| | | | | | | | | 200 | TR220-2-200-34 |
| 2500 | 2375 | 203 | 800 | - | 62 | 30 | 40 | 130 | TR250-1-200-34 |
| | | | | | | | | 200 | TR250-2-200-34 |
| 3000 | 2850 | 203 | 800 | - | 74 | 30 | 40 | 130 | TR300-1-200-34 |
| | | | | | | | | 200 | TR300-2-200-34 |